





126KV Solid-Core Ceramic Insulators (Table 2)

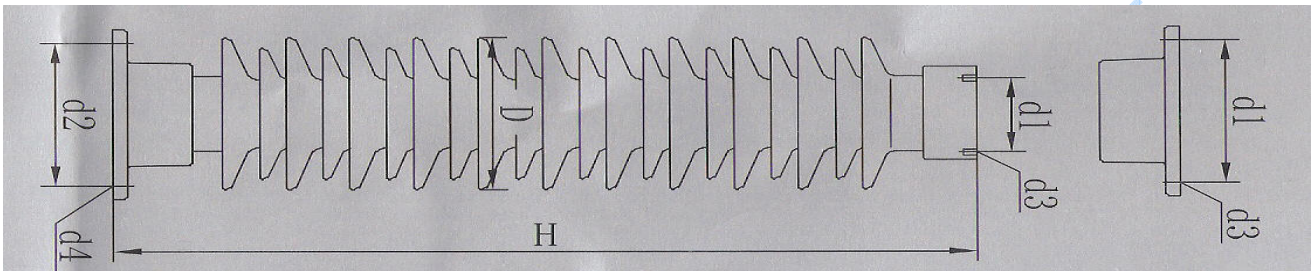

Product Code	Product Type	Rated Voltage(KV)	Drawing Number	Nominal Creepage Distance	Mechanical Failing Load(Not Less Than)		Main Dimension(mm)						Weight(kg)
					Bending KN	Torsion KN.m	H	D	d1	d3	d2	d4	
62843	ZSW3-126/8K-3	126	1	3150	8		1150	270	225	4-φ 18		8-φ 18	108
62708	ZSW1-126/10K-4	126	1	4080	10		1200	280	225	4-φ 18		8-φ 18	104
62721	ZSW1-126/10K-3	126	1	3200	10	8	1150	225	225	4-φ 18		8-φ 18	85
62823	ZSW2-126/10K-3	126	1	3732	10		1200	300	224	8-φ 18		8-φ 18	135
62830	ZSW3-126/10K-3	126	1	3100	10		1150	280	224	8-φ 18		8-φ 18	117
62725	ZSW1-126/10K-3	126	1	3150	10	8	1170	250	140	4-M12		4-φ 18	81
62739	ZSW1-126/12.5K-4	126	1	3906	12.5	10	1150	290	127	4-M16		8-φ 18	117
62709	ZSW1-126/12.5K-3	126	1	3200	12.5	10	1150	260	225	4-φ 18		8-φ 18	95
62720	ZSW2-126/12.5K-3	126	1	3150	12.5	10	1150	260	225	4-φ 18		8-φ 18	96
62740	ZSW3-126/12.5K-3	126	1	3892	12.5		1200	291	225	4-φ 18		8-φ 18	123
62822	ZSW4-126/12.5K-3	126	1	3100	12.5		1150	290	224	8-φ 18		8-φ 18	128
62839	ZSW5-126/12.5K-3	126	1	3100	12.5		1200	290	224	8-φ 18		8-φ 18	128
62728	ZSW1-126/12.5K-3	126	1	3200	12.5	10	1200	260	127	4-M16		8-φ 18	91
62848	ZSW1-126/12.5K-4	126	1	3906	12.5		1150	320	235	8-φ 18		8-φ 18	148
62826	ZSW1-126/16K-3	126	1	3200	16	10	1150	275	254	4-φ 18		8-φ 18	104
62844	ZSW5-126/16K-3	126	1	3150	16	10	1150	275	225	4-φ 18		8-φ 18	110
62845	ZSW6-126/16K-3	126	1	3150	16		1150	305	275	8-φ 18		8-φ 18	150
62827	ZSW2-126/16K-3	126	1	3100	16		1150	305	275	8-φ 18		8-φ 18	148
62831	ZSW3-126/16K-3	126	1	3150	16		1200	265	225	4-φ 18		8-φ 18	107
62832	ZSW4-126/16K-3	126	1	3150	16		1150	270	225	4-φ 18		8-φ 18	106
62842	ZSW1-126/18K-3	126	1	3150	18	7	1150	270	225	8-φ 18		8-φ 18	108
62835	ZSW1-126/20K-3	126	1	3150	20		1200	285	225	4-φ 18		4-φ 18	124

Type Bil 2250-2500KV

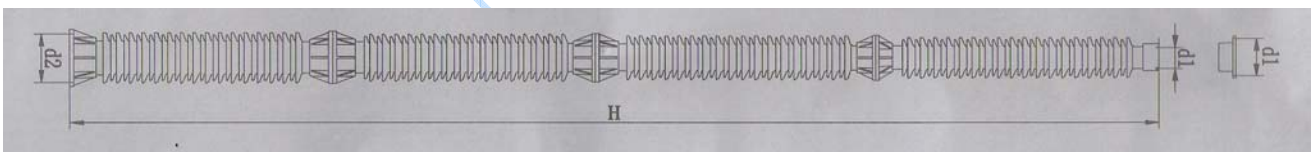

IEC POST INSULATOR DESIGNATION	C4-2250	C6-2250	C8-2250	C10-2250	C12.5-2250
Height H [mm]	5000±6.5	5000±6.5	5000±6.5	5000±6.5	5000±6.5
Top Fitting p.c.d.d1[mm]/Hole Pattern	225/4x18 254/8x18	225/4x18 254/8x18	225/4x18 254/8x18	225/4x18 254/8x18	225/4x18 254/8x18
Bottom Fitting p.c.d.d1[mm]/Hole Pattern	254/8x18	300/8x18	325/8x18	356/8x18	356/8x18
Minimum Failing Load-Bending[KN]	4	6	8	10	12.5
Minimum Failing Load-Torsion[KNM]	3	3	4	4	6
Lightning Impulse Withstand Voltage.Dry[KV Peak Value]	2250	2250	2250	2250	2250
Switching Impulse Withstand Voltage.wet[KV Peak Value]	1425	1425	1425	1425	1425

Quality in Manufacturing, Excellence in Service!

AP/AR
PO Box 1128
Orange, CT 06477


Sales & Marketing
1088 Orange Avenue
West Haven, CT 06516

Warehouse
475 Elm Street
West Haven, CT 06516

Int'l Forwarding & Logistics
JFK International Airport
Jamaica, New York 11430



72.5KV-126KV SF₆ Circuit Breaker Post Hollow Insulators (Table 1)

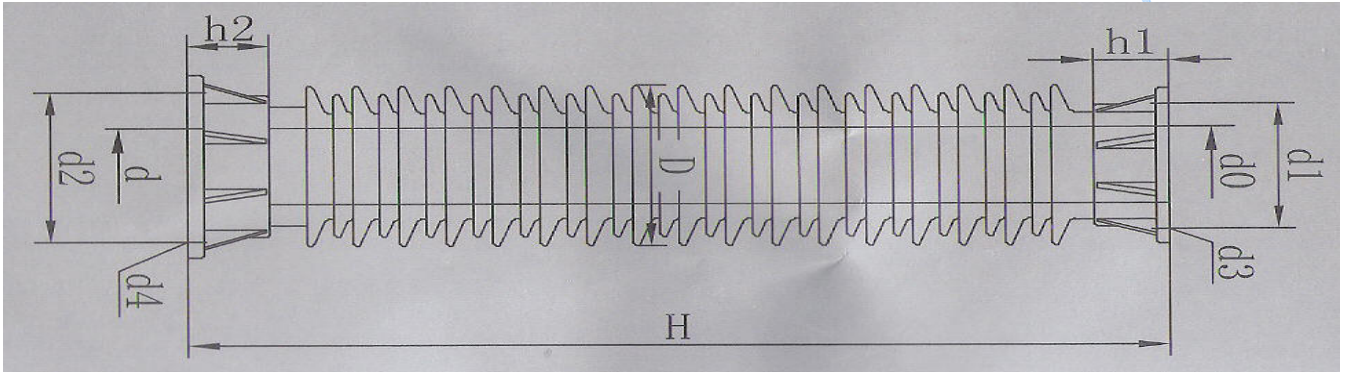

Product Code	Rated Voltage (KV)	Drawing Number	Nominal Creepage Distance(mm)	Interior Pressure Failing Load(Mpa)	Bending Failing Load KN.M	Main Dimension(mm)										Weight(kg)
						H	D	h 1	h 2	d 0	d	d1	d3	d2	d4	
81101	72.5	1	1815	4.5	10	1000	200	80	80	80	80	225	6-φ14	225	6-φ14	46
81102	72.5	1	2090	4	10	1080	282	80	80	160	160	295	6-φ14	295	6-φ14	72
81105	72.5	1	2280	5.7	22	1000	265	80	80	85	85	230	6-φ14	230	6-φ14	58
81106	72.5	1	2585	5.7	22	1080	330	80	80	160	160	295	6-φ14	295	6-φ14	83
81107	72.5	1	2248		18.1	920	318	110	110	110	110	300	8-φ18	300	8-φ18	110
82101	126	1	3660	3.7	56	1300	410	135	135	180	180	345	12-φ16	345	6-φ16	174
82102	126	1	3900	3.5	20	1400	300	90	90	130	130	286	6-φ15	286	6-φ19	115
82106	126	1	3950	4.3	22	1400	306	90	100	130	130	286	8-φ13	286	8-φ18	111
82110	126	1	2850	5	25.8	1291	360	125	125	210	210	396	12-φ13	396	12-φ13	122
82116	126	1	3625	4	20	1390	289	90	90	120	120	300	8-φ14	240	6-M12	96
82134	126	1	4723	2.3	55	1600	364	130	130	140	140	370	12-φ19	390	12-φ19	237
82135	126	1	4723	2.3	40	1600	364	130	130	190	190	370	12-φ19	370	12-φ19	184
82136	126	1	3075	4.3	30.1	1320	293	110	110	110	110	300	8-φ18	300	8-φ18	129
82137	126	1	3813	4.3	30.1	1320	319	110	110	110	110	300	8-φ18	300	8-φ18	152
82138	126	1	3906	4	20	1390	300	90	90	120	120	300	8-φ14	240	6-M12	107

Quality in Manufacturing, Excellence in Service!

AP/AR
PO Box 1128
Orange, CT 06477

Sales & Marketing
1088 Orange Avenue
West Haven, CT 06516

Warehouse
475 Elm Street
West Haven, CT 06516

Int'l Forwarding & Logistics
JFK International Airport
Jamaica, New York 11430

